


INFORMATION CONTAINED HEREIN IS CONSIDERED PROPRIETARY TO S. HIMMELSTEIN AND COMPANY. IT IS RELEASED ONLY FOR THE LIMITED PURPOSE OF REPAIR AND MAINTENANCE OF THE EQUIPMENT OR COMPONENTS THEREOF DESCRIBED HEREIN UNDER NO CIRCUMSTANCES SHALL THIS INFORMATION BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN CONSENT OF S. HIMMELSTEIN AND COMPANY.

OPTIONAL SPEED PICKUP
MATING CONNECTORS SUPPLIED
(MS 3106A 10SL-4S STD TYPE, CODE A)

3X MINI-CON-X® CONNECTORS FOR
TORQUE, RS232C, AND POWER
MATING CONNECTORS SUPPLIED
SEE 224-8244 FOR DETAILS

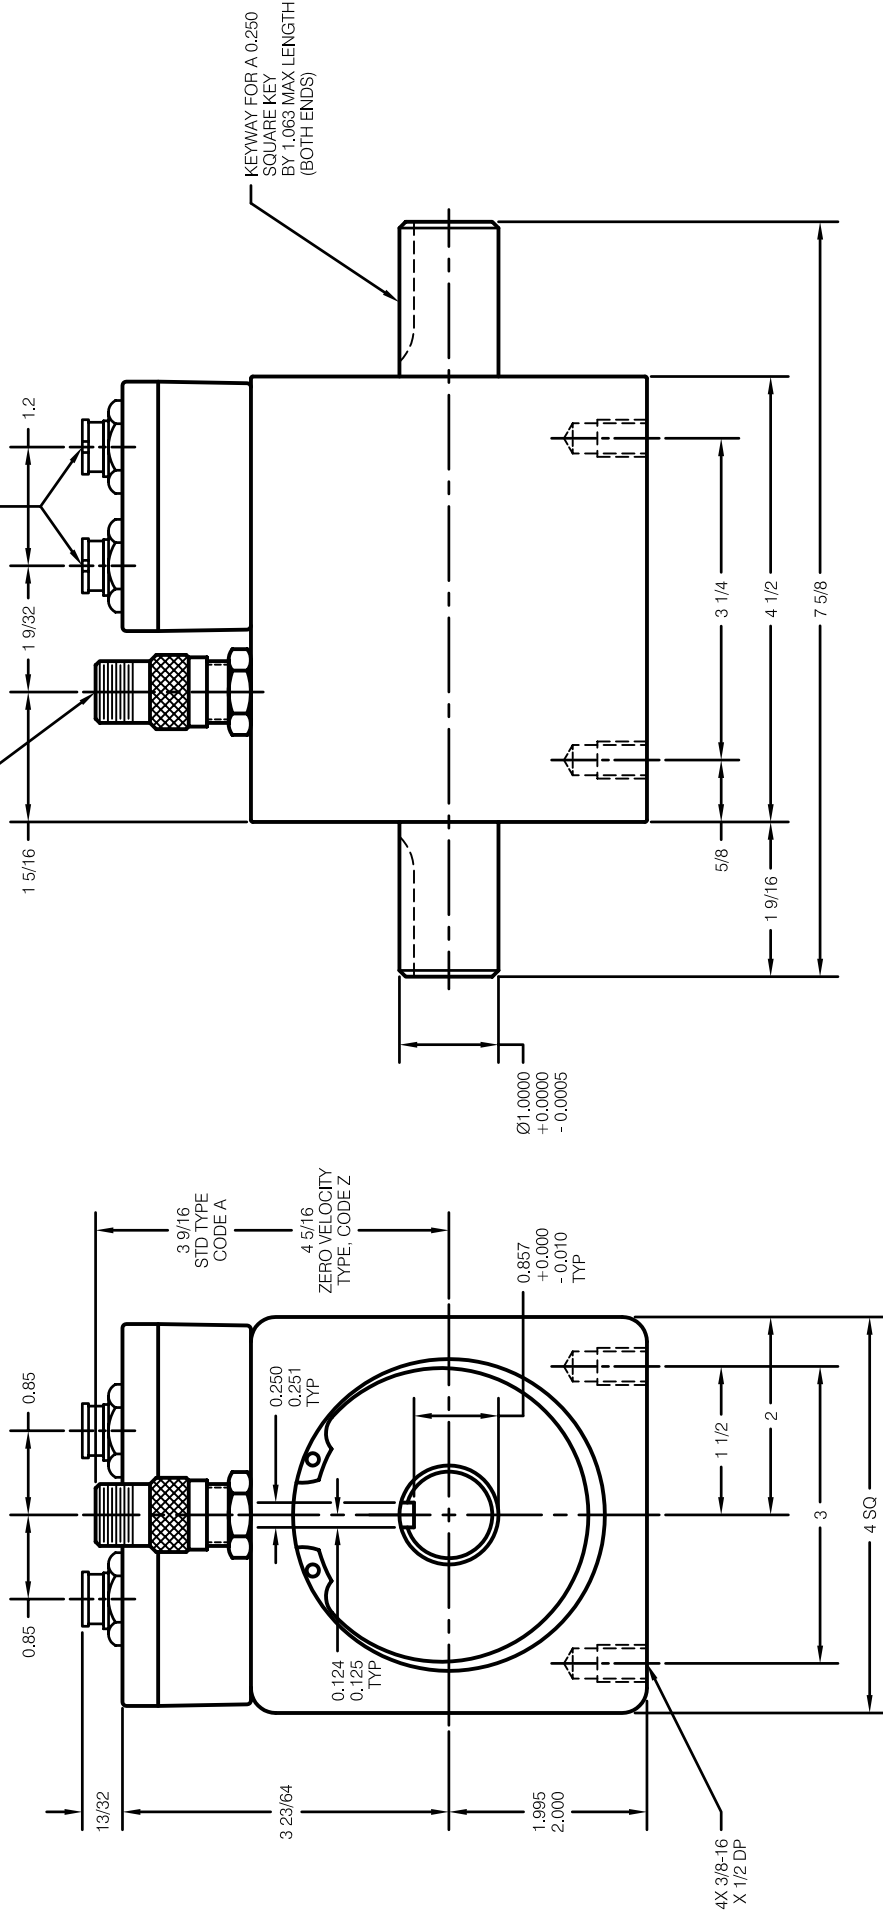

PLOTTED: 09/12/2006 @01:26, ENG REF ONLY: 48061.DWG, GBD295

SYMBOL		DESCRIPTION	DATE	APP	SYMBOL	DESCRIPTION	DATE	APP
REVISIONS		REVISIONS						
MATERIAL:		DEBURR & BREAK SHARP EDGES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES						
FINISH:		SURFACE FINISH 63 7						
DRAWN: Allen J. Jacks		DATE: 07/10/06						
CHECKED: Gerald Buttery		DATE: 08/12/2006						
ENGINEER: Allen J. Jacks		DATE: 07/10/04						
SCALE: FULL		SIZE: C	SHEET 1 OF 1		REV			
S. HIMMELSTEIN & Co.		OUTLINE 48203V						
224-8061								